

POLYKEN®

#936 High U.V. Resistant/High Tack Joint Wrap Tape

System Description

Polyken 936 is a long-term UV resistant high tackjoint wrap for above or below ground use. This unique product is easily applied to field joints, fittings, tees and ells. The adhesive system on Polyken 936 retains its high tack properties at a range of temperatures from -30°F (-34°C) to 150°F (66°C). The polyolefinic backing has excellent conformability, and built-in resistance to environmental stress cracking (ESCR). In addition, the built in UV protection makes Polyken 936 an excellent candidate for above or below ground applications of joint wrapping, where top performance is required. Polyken 936 is available in black.

Features and Benefits

• Proven Optimum Corrosion Protection

The combination of a butyl rubber based adhesive system and a high tech, high performance polyolefinic backing is a well-documented, successful product construction for long term protection of steel structures.

• Strong Bond

Polyken 936 achieves an immediate aggressive bond to primed steel surfaces, even at temperatures below freezing.

• Versatile

Polyken 936 can be used as a jointwrap or patch/repair material with all Polyken pipeline products, as well as with all major pipecoating systems.

• Easy to Apply

Polyken936 can be applied by hand or machine at ambient temperature with Polyken primer.

• Meets Many Standards

Polyken 936 meets or exceeds many of the industrial standards as well as Federal and military specifications.

• Conformable


The combination of extreme conformability and elasticity allows a strong, tough, wrinkle-free coating, even on irregular structures such as valves, couplings, or fittings.

• Environmentally Stable

While conventional polyethylene backed products tend to environmentally stress crack at moderate strain levels, Polyken 936 resists cracking from stress caused by environmental accelerants such as soaps, oils, detergents, and other surface active agents.

Test Methods:

- 1) ASTM D-1000M
- 2) ASTM D-257
- 3) ASTM E-398
- 4) Polyken Environmental Stress Crack Resistance Test (Copies available on request.)

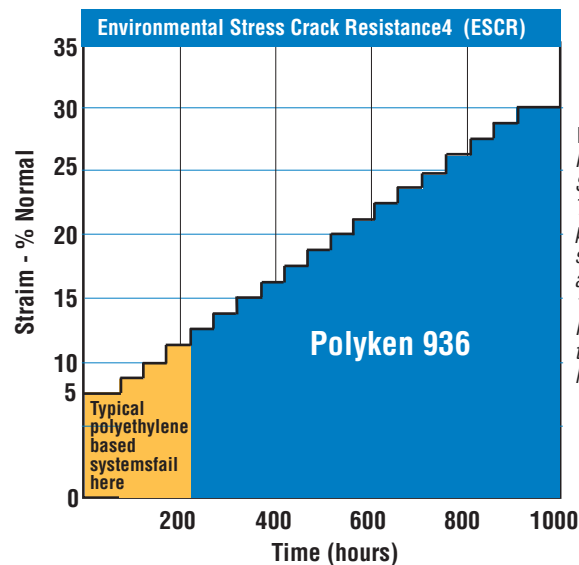

When subjected to the Polyken Environmental Stress Crack Resistance Test, conventional polyethylene based tape systems typically fail at about 10-15% strain at 150-200 hours, where as Polyken's 936 accepts up to 30% strain at 1000 hours with no failures.

Product Properties

Backing: Polyolefinic based
Adhesive: Butyl Rubber based

Physical Properties

	English		Metric	
	936-30	936-50	936-30	936-50
Thickness				
• Backing	5 mils	12 mils	.127mm	.305mm
• Adhesive	25	38	.635	.965
• Total	30	50	.762	1.27
Tensile Strength	20	40 lb/in	3.57	7.11 kg/cm
• Elongation (1% at Break)	600%	600%	600%	600%
• Adhesion to Primed Steel	200	225 oz/in	2.24	2.52 kg/cm
• Compatible with coal tar, fusion bonded epoxy, asphalt and polyethylene pipe coatings				
Electrical and Moisture Resistance				
• Dielectric Strength	20 kv	22kv	20kv	22kv
• Insulation Resistance	1,000,000 megohms		1,000,000 megohms	
• Water Vapor Transmission Rate	0.05g/100 in ² /25 hr		0.78g/m ² /24 hr	

Note: Dielectric strength is not intended as a suggested holiday jeeping voltage.
Refer to NACE Standard RP-02-74 for recommended holiday detection voltage.

Environmental Stress Crack Resistance (ESCR):

Test Methods:

1. ASTM D-1000M
2. ASTM D-257
3. ASTM E-398
4. Polyken Environmental Stress Crack

**Contact a Berry Plastics representative for specific project recommendations.*

Berry Plastics warrants that the product conforms to its chemical and physical description and is appropriate for the use stated on the technical data sheet when used in compliance with Berry Plastics written instructions. Since many installation factors are beyond the control of Berry Plastics, the user shall determine the suitability of the products for the intended use and assume all risks and liabilities in connection herewith. Berry Plastics liability is stated in the standard terms and conditions of sale. Berry Plastics makes no other warranty either expressed or implied. All information contained in this technical data sheet is to be used as a guide and is subject to change without notice. This technical data sheet supersedes all previous data sheets on this product.



CORROSION PROTECTION GROUP

www.berrycpg.com

DISTRIBUIDOR LOCAL/REPRESENTANTE:



MSP

MATSERVICE PETRÓLEO

ÚNICO REPRESENTANTE

PARA EL TERRITORIO BOLIVIANO

Headquarters : Berry Plastics Tapes & Coatings Division, Franklin MA, USA

Franklin, MA, USA

Tel: +1 508 918 1714
US Toll Free: +1 800 248 0149
Fax: +1 508 918 1910
CPG@berryplastics.com

Houston, TX, USA

Tel: +1 713 676 0085
US Toll Free: 01 888 676 7202
Fax: +1 713 676 0086
CPGH@berryplastics.com

Tijuana, Mexico

Tel USA +1 858 633 9797
Fax US: +1 858 633 9740
Tel Mexico: +52 664 647 4397
Fax Mexico: +52 664 647 4370
CPGTJ@berryplastics.com

Westerlo, Belgium

Tel. +32 14 722500
Fax +32 14 722570
CPGE@berryplastics.com

Baroda, India

Tel: +91 2667 264721
Fax: +91 2667 264724
CPGIN@berryplastics.com